




## Call Display 326

*Please read  
Part 1 – Important  
Product Information.*

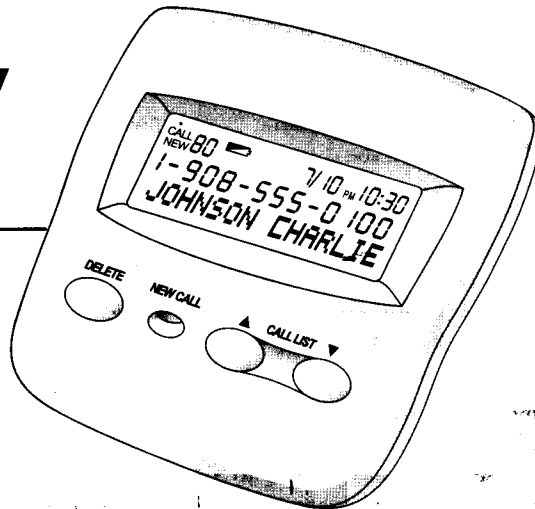

For Customer Service Or Product  
Information, Visit Our Website At  
[www.telephones.att.com](http://www.telephones.att.com)

AT&T and the globe symbol are registered trademarks of AT&T Corp. licensed to Advanced American Telephones.

© 2001 Advanced American Telephones. All rights reserved.  
Printed in China. Issue 1AT&T 1/01

## About Caller Identification

This product is designed to store and display information about incoming telephone calls. It must be used with Caller Identification service provided by your local telephone company; there is a fee for this service, and it may not be available in all areas. This product can provide information only if both you and the caller are in areas offering Caller Identification service, and if both telephone companies use compatible equipment.

When you use this product with Caller ID service, you can see who's calling before you answer the phone. The unit keeps a record of the names and numbers of the last 80 calls, whether you answer the phone or not. Each call is numbered in the call history, with older calls having lower numbers.

When the first call is received, the current time and date are set automatically (you cannot set them), and are reset each time a new call comes in.

## Set Screen Options

You can adjust the display contrast, and you can select either English, French or Spanish for display prompts. The unit is preset for English displays.

### Setting Display Contrast

- 1 Press and hold **DELETE**.
- 2 While you are holding **DELETE**, press **CALL LIST** **▲** or **▼**. The current contrast setting will be displayed.
- 3 When the screen displays the current contrast level, release **DELETE**. If this setting is correct skip to **Step 5**.
- 4 To change the contrast setting, press **CALL LIST** **▲** or **▼** until your contrast level setting (1-5) is displayed.
- 5 Press and release **DELETE** to save the displayed contrast level and move to Display Language Setup.

### Select Display Language

- 1 The screen displays the current language setting (from **Step 5** above). If this setting is correct, skip to **Step 3**.
- 2 To change the language setting, press **CALL LIST** **▲** or **▼** until your language selection is displayed.
- 3 Press and release **DELETE** to save the displayed language and exit the setup menu.

**NOTE:** When setting screen options, if no selection is made within 13 seconds the unit will return to idle and the screen will return to standby.

## Review Call History

When the unit is idle, the screen displays the date, time, number of new messages, and total messages. To view call history, press **CALL LIST** **▲** or **▼**. Use **▲** or **▼** to scroll through call history.


**NOTE:** Buttons are inactive while the phone is ringing or for a few seconds afterward.

# INSTALLATION

**⚠ CAUTION:** Make sure the unit is not connected to the phone line when installing batteries.


## Install Batteries

Use a screwdriver to open the battery compartment as shown, and install 3 new AAA alkaline batteries. When battery power is low, the screen displays **REPLACE BATTERY** and the battery icon blinks. Replace batteries promptly.

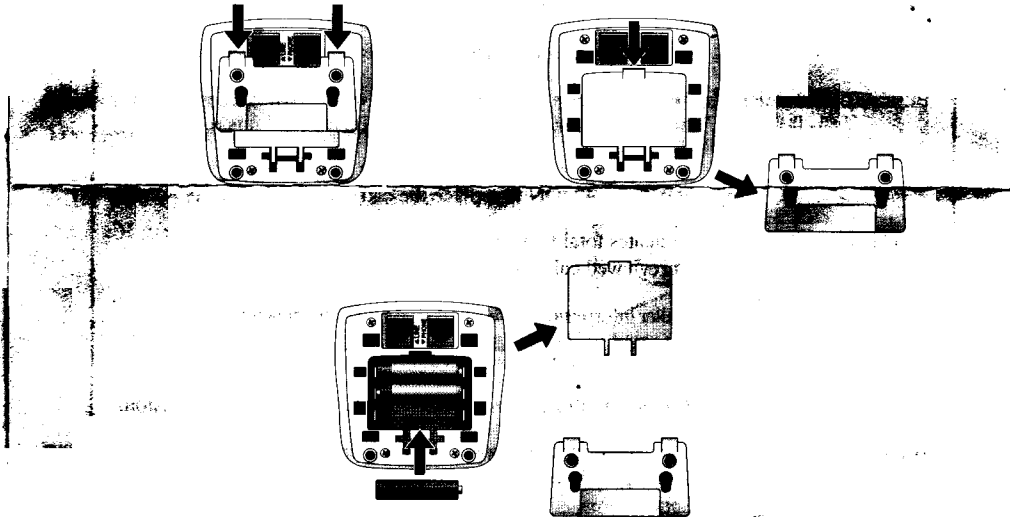

## Table/Desk


Connect the unit to a telephone and the modular jack, as shown below. If you wish, you can connect the unit to the telephone and an answering system set to answer calls after at least two rings.

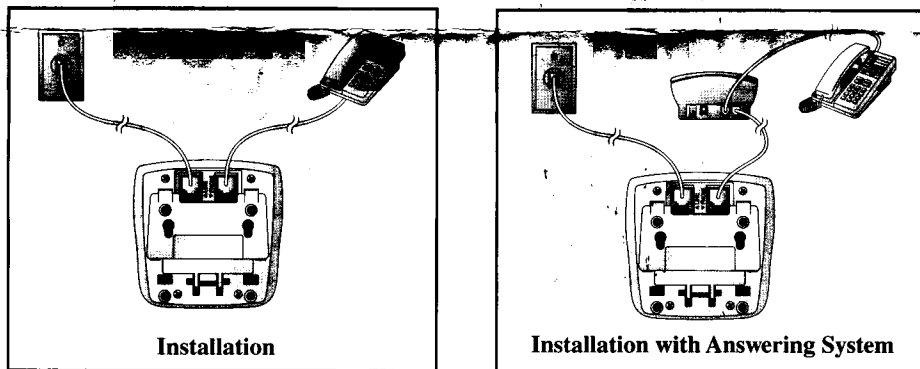

# INSTALLATION


## Wall

- 1 Remove and turn the bracket as shown in *Figure 1*. Use the bracket as a template to make screw holes. Install two screws (not provided).

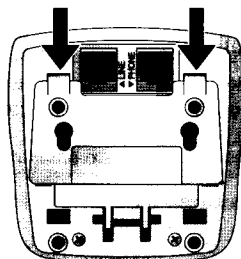


*Figure 1*

- 2 Turn the bracket (*Figure 2*) and reattach to the base.

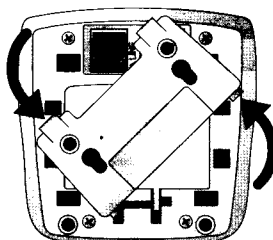

*Figure 2*

- 3 Pull base down on screws.

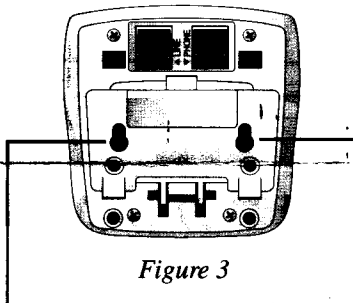

*Figure 3*

*Screw holes*

- 4 Connect line cords as shown in Table/Desk installation.

### Remove a Call from Call History


While reviewing a call record, press and release **DELETE** to permanently delete displayed call information.

### Remove All Calls from Call History

- 1 While reviewing a call record, press and hold **DELETE** for about three seconds. The screen displays DELETE ALL?.
- 2 Press **DELETE** to remove all calls  
— OR —  
Wait 10 seconds to exit without deleting any calls.

### NEW CALL Light


The light on the unit blinks when you have unreviewed call information in the call history. After you've reviewed all call information, the light goes off.

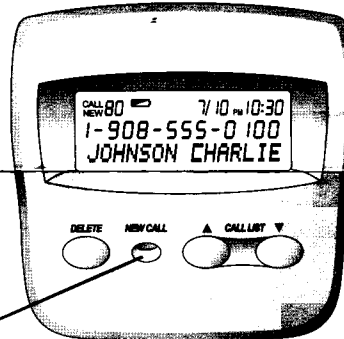



NEW CALL Light

### Display Screen

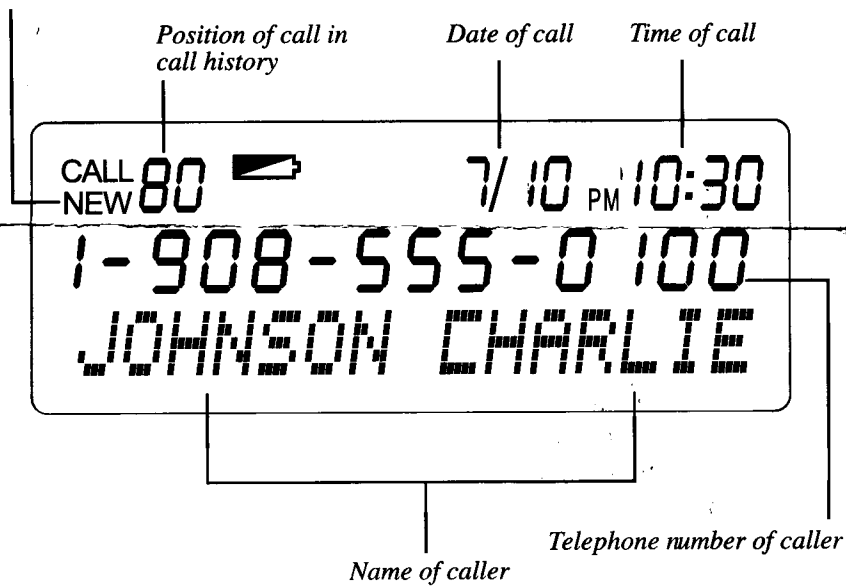Indicates new call information



## DISPLAY SCREEN MESSAGES

END OF LIST	You've reached the end of the call history. Press the CALL LIST  or  to continue.
NO MESSAGE	You received no calls since you last cleared the call history.
LONG DISTANCE	Incoming call is from an area without Caller Identification service or from a different regional company, and the call information can't be determined.
NO DATA	No call information has been received by your provider.
BLOCKED NAME	The caller has requested that name information not be sent.
BLOCKED NUMBER	When single/multi format message is received with private number, the screen displays the name, if it is received.
REPLACE BATTERY	Battery power is low. Follow the directions in INSTALLATION to replace the batteries.
TOTAL NEW	Indicates total number of calls received, and number of unreviewed calls in the call history.
UNKNOWN NUMBER	Caller information has been received with an unknown number.
BLOCKED CALL	The caller has requested that information not be sent.
ERROR	Caller ID information has been corrupted during transmission.
UNKNOWN CALLER	The caller does not have Caller ID service or has a service incompatible with yours, or is out of your Caller ID service area.
UNKNOWN NAME	Name information is unavailable for this number.